
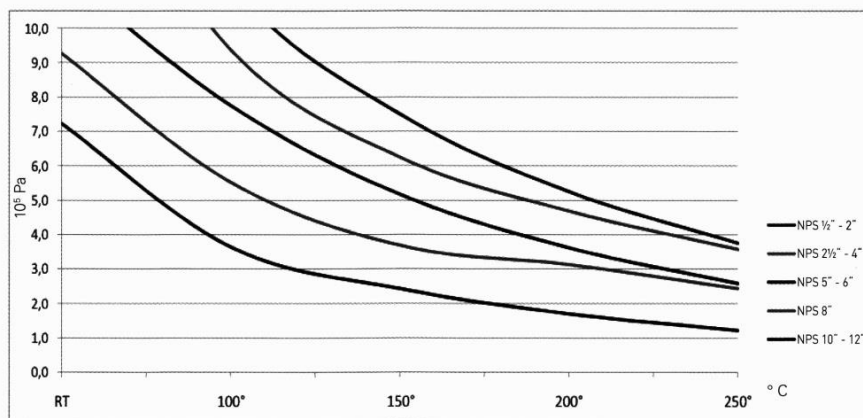


Picture for illustration only, type of steel fabrication varies

PTFE BELLOWS

3 CONVOLUTIONS

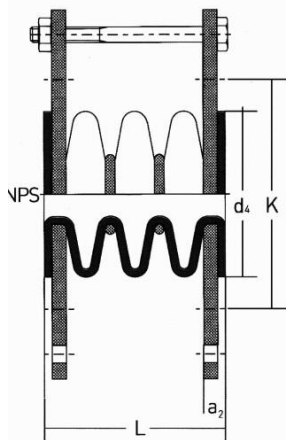

NB	L	Long Displ	Lateral Displ	Angular Displ	Vac		d ₄	K	a ₂	Bolts	Wt
#150	(mm)	+/- (mm)	Max (mm)	(°)	10 ⁵ Pa	°C max	(mm)	(mm)	(mm)	UNC/ASA	kg
1/2"	70	10	6	14	-1.00	200	35.1	60.5	11.00	4 x 1/2"	1.7
3/4"	70	10	6	14	-1.00	200	42.9	69.9	11.00	4 x 1/2"	1.7
1"	70	10	6	14	-1.00	200	50.8	79.2	11.00	4 x 1/2"	1.7
1 1/4"	75	10	6	14	-1.00	200	63.5	88.9	13.00	4 x 1/2"	2.1
1 1/2"	80	15	6	14	-1.00	200	73.2	98.6	13.00	4 x 1/2"	2.6
2"	85	15	9	14	-1.00	200	91.9	120.7	15.00	4 x 5/8"	3.8
2 1/2"	100	20	9	14	-1.00	200	104.6	139.7	15.00	4 x 5/8"	4.6
3"	110	20	13	14	-1.00	200	127.0	152.4	15.50	4 x 19.1	5.3
4"	110	25	13	14	-1.00	200	157.2	190.5	19.00	8 x 19.1	7.0
5"	120	25	14	14	-1.00	150	185.7	215.9	19.25	8 x 22.4	11.4
6"	130	25	14	14	-1.00	150	215.9	241.3	23.00	8 x 22.4	12.7
8"	140	30	14	14	-1.00	50	269.7	298.5	25.00	8 x 22.4	21.0
10"	165	30	14	14	-0.93	45	323.9	362.0	28.00	12 x 25.4	27.0
12"	175	30	15	14	-0.85	45	381.0	431.8	31.00	12 x 25.4	35.0

OTHER OPTIONS

- 2, 5 or more convolutions available on request
- Conductive PTFE
- Higher lining thickness and pressure rating on request
- SS Flange
- SS Bellow with PTFE lining

